

Leak-Safe Flange Packing use of Gasket

Rubber Sheet

Made in India






PERFORMANCE MEETS
COMPRESSION-SET SEALING
FEATURES



Gym Rubber Mat



Synthetic SBR, EPDM, Neoprene, Silicone,Viton As per IS 5192, BS 2752



Insertion Ply Natural per IS 638



Nitrile Rubberized Cork per IS 4253





Installation & WarrantyInformation






Wish Leak-free
Corrosion Safe
Lining, Sealing
and Flooring



Manufacturing Range at: www.UniversalDelhi.org
Profile at: www.hicRubber.com














Thank You for Purchasing HIC "UNIVERSAL" Rubber Gasket Sheet

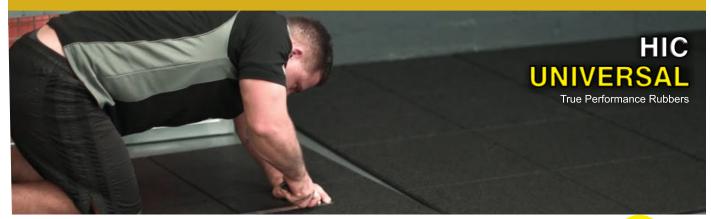

Secured Packing Insulation Rubber Sheets Installation **Tips**



- 1. Appropriate Thickness for Anti-corrosion Protection and Sound Insulation be used of rubber sheet in packing of Die Cut Custom Flange Gasket and Diaphragm jointing material.
- 2. Safe Compression Packing even if Blisters or pin holes gets visible at times in rubber sheeting rolls, nothing to interfere seal strength.
- 3. Human Safety is ensured using Shot Blasting equipment sheet-rubber cabinet lining and Sewage Manhole Gasket made of Impact Resistant Natural rubber Or Abrasion Resistant commercial SBR grade fabric reinforced insertion sheeting.
- 4. Choose Right Rubber Lining of Tank & Transportation Vessels considering storage material characteristics as to temperature, chemical concentration for overall protection like **EPDM** sheeting for Acid Storage Tanks, Automobile Beading & Roofing Membrane,

Nitrile lining for Hydrocarbons, Mineral Oil Storage Tank & Air Conditioner Pipelines Ducting,

Neoprene sheeting for Wind Tower, Acoustics and Noise Reduction & Splash Zone Area Riser Pipes offshore structure Cladding system.

- 5. Animals Injury Protection & More Milk Yield is proven with moisture-free natural surrounding by use of Cow mats.
- 6. High Temperature Resistant Membrane be used of FDA conforming Food Grade Silicone sheet packing for Woodworking Vacuum Press, Solar Laminator, Medical Pads, Food & Beverage And Viton gasket sheeting for Aerospace Fuels, Oil Field & Gas Industry.
- 7. Anti-slip Cow Mats Hammer Top pattern with hollow bottom Interlocking design for comfort, hygiene & injury protection safety in flooring animal husbandry be used.

Size variation (+,-0.5 mm Thickness; +,-1% Width & Length), +,-5 mm Shore Hardness for gasket material Rubber Sheets Neoprene CR, Nitrile NBR, EPDM, Rubberized Cork, Shot Blast, Silicone, Commercial White Insertion sheeting as per HIC manufacturing tolerance should be acceptable.

Steps for packing gasket insulation Keep in hand following: "HIC Universal" Rubber Sheeting Utility knife 1/4-inch plywood Circle gasket cutter Steel rule Hollow gasket cutter Paint marker Dead-blow mallet

Disclaimer: Information's, written and verbal are provided by HIC, relative to its rubber gasket cutting sheet which it determines to be reliable & no liabilities of whatsoever nature in regards to its uses. The purchaser of HIC UNIVERSAL brand rubber sheeting roll should determine for itself the suitability of such rubber products.

Selection Guide: www.hic-india.com | Technical Data Download: www.hicinsulation.com | Reach HIC: export@hicrubber.com





Why HIC Universal

Gasket Rubber Sheets?

Ozone-proof SBR, EPDM, Neoprene CR, Viton Protective Seal High Resistance to Heat, Weather, Steam, Water, Oil, Chemicals

Excellent Compression Set Insertion Ply RMA, Silicone PaddingApt for Manhole Cover, Shot Blast, Pump, Valve, Medical Strips

Friction-proof Nitrile Cork and Corrosion-proof NBR Jointing

Versatile Transformer Noise Isolation, Storage Tank Lining

- f facebook.com/hicguptas
- twitter.com/Rubber_HIC
- instagram.com/hicinternationalcoinc
- > youtube.com/channel/UC7DFI0-YFzL2F8sKxZ4M0PA
- in in.linkedin.com/in/anil-gupta-0800a437
- n.pinterest.com/universaldelhi/



www.hic-india.com

WARRANTY CERTIFICATE

The goods tailor-made, supplied as per buyer's P.O. specifications is warranted against any manufacturing defects for 12 months from the date of Invoice, and assume liability of repairing free of cost in the event of any manufacturing defects.

HIC Int. shall be under no liability in respect of any defect in the goods arising from any drawing, design or specification supplied by the Client. Goods claimed to be in default must be returned to HIC's factory at client cost; cost for return transport prepaid.



HIC INTERNATIONAL CO INC +91 88266 79660 | export@hicrubber.com

